


LANYARDS AND WORK POSITIONING ROPES



LOOP 26 kN INGEDREHTES AUGE

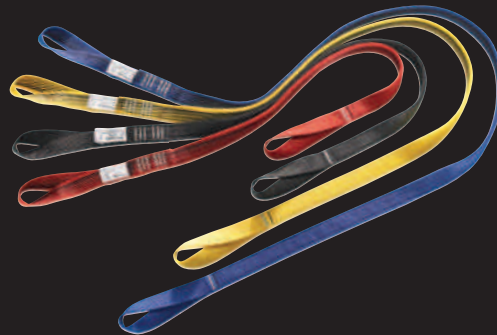

EN 354, EN 795-B, EN 566	25 mm								
mat	PA	PA	PA	PA	PA	PA	PA	PA	PA
	66 g	80 g	89 g	98 g	107 g	116 g	125 g	134 g	143 g
läng	0,6 m	0,75 m	0,85 m	0,95 m	1,05 m	1,15 m	1,25 m	1,35 m	1,45 m
col									
	L-0465-0,6	L-0465-0,75	L-0465-0,85	L-0465-0,95	L-0465-1,05	L-0465-1,15	L-0465-1,25	L-0465-1,35	L-0465-1,45



LOOP 35 kN



EN 354, EN 795-B, EN 566	25 mm							
mat	PA	PA	PA	PA	PA	PA	PA	PA
	61 g	91 g	108 g	141 g	158 g	196 g	233 g	258 g
läng	0,4 m	0,6 m	0,8 m	1 m	1,2 m	1,5 m	1,8 m	2 m
col								
	L-0010-GE-0,4	L-0010-GE-0,6	L-0010-GE-0,8	L-0010-GE-1	L-0010-GE-1,2	L-0010-GE-1,5	L-0010-GE-1,8	L-0010-GE-2
col								
	L-0010-SW-0,4	L-0010-SW-0,6	L-0010-SW0,8	L-0010-SW-1	L-0010-SW-1,2	L-0010-SW-1,5	L-0010-SW-1,8	L-0010-SW-2